



# TRI-TAP

**MED 3 SLEBNE  
GRIBEFLLADER**



**Med 3  
slebne  
gribeflader**



## **BAER Tri-Tap** **HSS-E dampbehandlet til metrisk ISO-gevind**

Vi introducerer en helt ny produktionstap med 3 slebne gribeflader til brug i borepatronen.



- Til maskinbrug
- Gevindtype: Metrisk
- Materiale: HSS-E
- Overflade: Dampbehandlet
- Anvendes til: Stål, rustfrit stål, INOX, V2A, V4A
- DIN 371/376
- Stål op til et maksimum på 900 N/mm<sup>2</sup>
- Kobberlegeringer og messing (langspånende)

# Tri-Tap spånbrydertap


110409



■ Til gennemgangshuller

DIN 371	Varenr.	□	L1	L2	ØD	ØD2	Lager
M 3 x 0,5	110409004	2,7	56	11	3,0	3,5	✓
M 4 x 0,7	110409006	3,4	63	13	4,0	4,5	✓
M 5 x 0,8	110409007	4,9	70	16	5,0	6,0	✓
M 6 x 1,0	110409008	4,9	80	19	6,0	6,0	✓
M 8 x 1,25	110409009	6,2	90	22	8,0	8,0	✓
M 10 x 1,5	110409010	8,0	100	24	10,0	10,0	✓

DIN 376	Varenr.	□	L1	L2	ØD	ØD2	Lager
M 12 x 1,75	110409011	7,0	110	29	12,0	9,0	✓

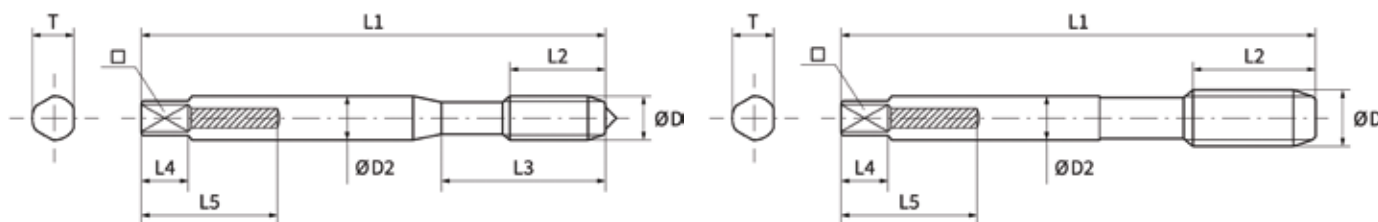

## Tri-Tap spånbrydertapsæt

HSSE-VAP TriTap incl. gevindbor

### INDHOLD:

- Tappe: M 3 - 4 - 5 - 6 - 8 - 10 - (DIN 371), M 12 (DIN 376)
- Bor: 2,5 - 3,3 - 4,2 - 5,0 - 6,8 - 8,5 - 10,2 mm

Varenr. TRISD312

# 1.101<sup>50</sup>

# TRI-TAP spiraltap


110609



■ Til bundhuller

DIN 371	Varenr.	□	L1	L2	ØD	ØD2	Lager
M 3 x 0,5	110609004	2,7	56	6	3,0	3,5	✓
M 4 x 0,7	110609006	3,4	63	7	4,0	4,5	✓
M 5 x 0,8	110609007	4,9	70	8	5,0	6,0	✓
M 6 x 1,0	110609008	4,9	80	10	6,0	6,0	✓
M 8 x 1,25	110609009	6,2	90	14	8,0	8,0	✓
M 10 x 1,5	110609010	8,0	100	16	10,0	10,0	✓

DIN 376	Varenr.	□	L1	L2	ØD	ØD2	Lager
M 12 x 1,75	110609011	7,0	110	18	12,0	9,0	✓

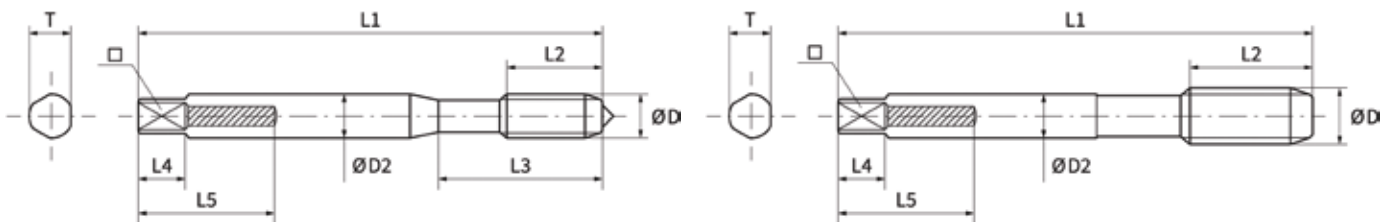

## Tri-Tap spiraltapsæt

HSSE-VAP TriTap 35° incl. gevindbor

### INDHOLD:

- Tappe: M 3 - 4 - 5 - 6 - 8 - 10 - (DIN 371), M 12 (DIN 376)
- Bor: 2,5 - 3,3 - 4,2 - 5,0 - 6,8 - 8,5 - 10,2 mm

Varenr. **TRISS312**

**1.180<sup>00</sup>**